

Small capacity air pump

ML-6A/6AS/6B/6BS



DC motor driven

ML-6A / 6B : Pressure type

ML-6AS / 6BS : Vacuum type

Built-in use


*No power plug included because it is designed for built-in use.

Applications

- Supply and pressurization of air in air mats
- Extraction of air for vacuum packaging
- Suction means for air-tweezers
- Air sampling

Dimensions


(unit : mm)

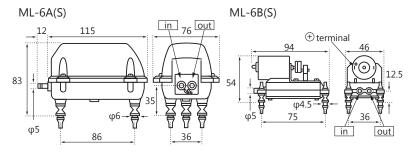

Specifications

	ML-6A / 6AS	ML-6B / 6BS
Rated voltage [V]	DC12	
Power current [mA]	450	
Airflow volume [L/min]	5 (-4.5)	
Sound level [dBA]	37	58
Weight [kg]	0.5	0.22

- *The value in parentheses represents ML-6AS, ML-6BS vacuum.
- *Sound data shown is with pump operating at 20kPa and exhaust plumbed away from the unit.

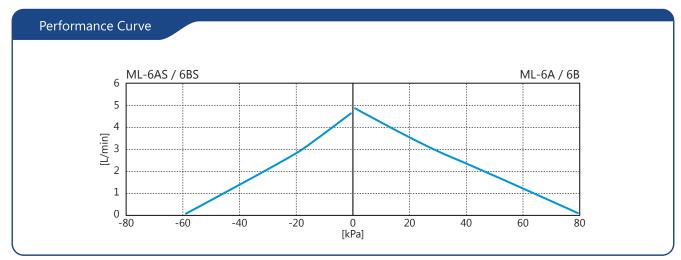

- * All characteristics values are only for reference, and are not guaranteed values.
- * Note that the operating temperature for our pumps is 41°F(5°C) to 104°F(40°C).

^{*}Rubber-made legs are sharp-pointed. Not for self-standing installation.